

Products Covered

152.100.006 SCREW-INSERT-RUSPERT-M6 152.100.008 SCREW-INSERT-RUSPERT-M8



Female screw anchor

152.100.006 (M6 Type) and 152.100.008 (M8 Type)

A highly innovative self-tapping concrete screw anchor which can also be used for all solid base materials installation by its *Screw-In Screw System* feature. Longer length anchors are unnecessary as you can simply increase the setting depth.

Coating

Zinc plated and Silver 500 hr salt spray ruspert coating

Application

- Light suspension/ Pipe support/ Conduit suspension
- HVAC > Installation technology
- Electro > Assembly, fireproof
- Metal > Fixation using bolts, steel studding and all-thread.
- Wood > Multiple applications

Benefits

- Flexibility in thread length
- Through Thread
- Easy hexagon drive installation
- Easy to remove
- No special tools needed



Concrete




Brick



Wood




Ruspert Coated

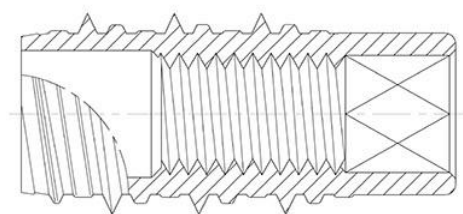


Part No.	Thread Type & Length	Drill Hole Depth (min)	Length	Drill Bit Size	Allen Key Size	Setting Torque (Nm)
152.100.006	M6x1.0	33mm	28mm	9mm	6mm	5-10
152.100.008	M8x1.25	37mm	32mm	12mm	8mm	15

Use in:

Concrete ✓ Brick ✓ Wood ✓

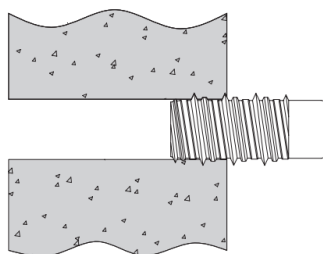

easy and fast
removeable

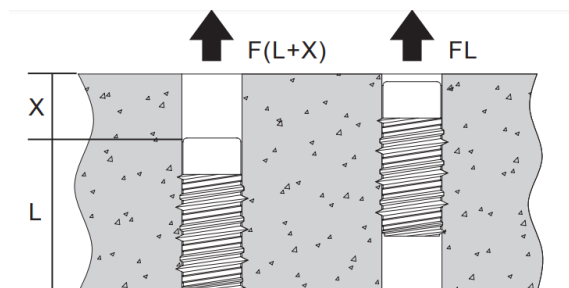

Increasing the setting depth increases pull out load