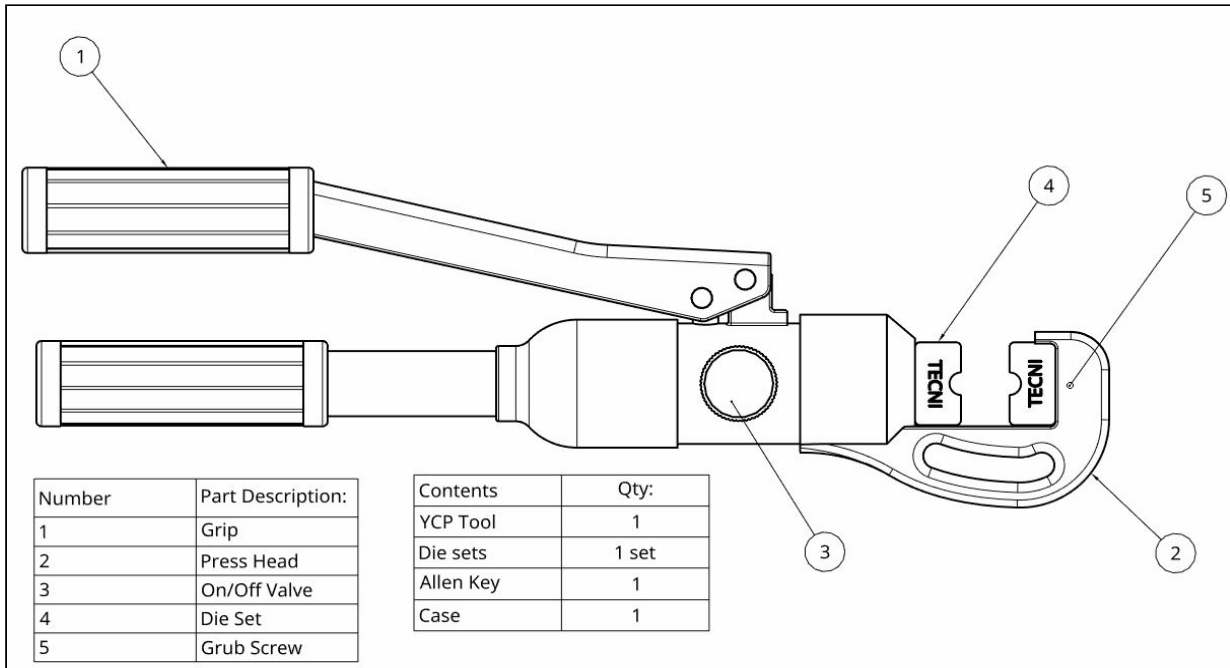


TECNI YCP 240C INSTRUCTIONS



1/ CONTENTS



2/ DESCRIPTION

Catalogue Code: 101.200.240

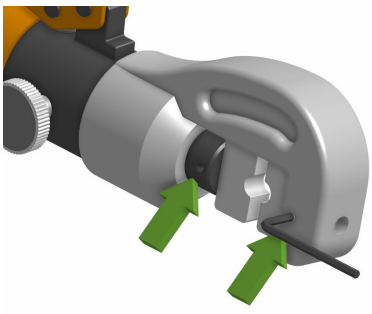
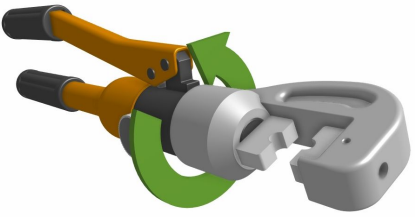
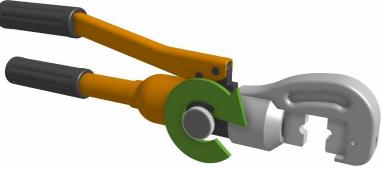
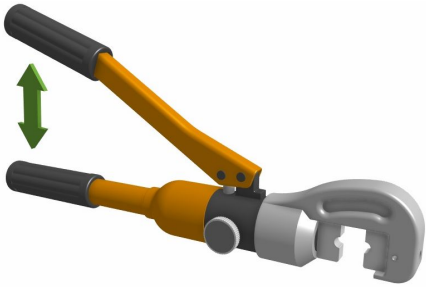
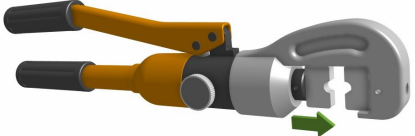
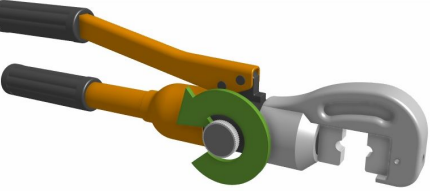
Part Code: TECNI-CRIMPER-HYDRAULIC-YCP-240C-4MM-8MM

Item Description:

Low effort, compact and economical hydraulic crimper for securely crimping stainless steel standard swage fittings, copper ferrules, and aluminium ferrules and stop ferrules onto wire rope. The tool comes with a range of TECNI designed, hardened dies. The C-shape crimping head rotates through 180 degrees to allow you to crimp comfortably in awkward positions. It has a two speed action and is fitted with a safety valve which automatically releases when the maximum pressure is reached.

MODEL	WIRE ROPE DIAMETER (MM)	WORKING PRESSURE (T)	WORKING TRAVEL (MM)	SIZE OF DIE SET	HYDRAULIC OIL
YCP-240C	2-8	12	25	4.5AL-CU 5AL-CU 6AL-CU 6.5AL-CU 7AL-CU 8AL-CU 9AL-CU HEX-2-2.5-SS HEX-3-SS HEX-4-SS HEX-5-SS	#20 HYDRAULIC OIL

3/ USING THE TOOL

		
<p>1/ CHANGE DIE SET TO CORRECT SIZE DIE. LOOSEN THE GRUB SCREWS AS PER DIAGRAM. **DO NOT REMOVE THESE AS THEY ARE SPRING LOADED** HAND TIGHTEN ONLY.</p>	<p>2/ ADJUST CRIMP TOOL HEAD TO SUIT CUTTING POSITION. *WARNING* TWIST BACK AFTER ADJUSTMENT.</p>	<p>3/ TWIST VALVE INTO ON POSITION FIRMLY (CLOCKWISE)</p>
		
<p>4/ PLACE FERRULE / TERMINAL IN THE DIES AND PUMP HANDLE TO CLOSE THE DIE SET</p>	<p>5/ THE DIE SET WILL MOVE SLOWLY TOWARDS THE FIXED DIE.</p>	<p>6/ WHEN MAXIMUM PRESSURE HAS BEEN ACHIEVED / FULL DIE CLOSURE. THE MACHINE WILL “CLICK OUT”. YOU WILL THEN NEED TO RELEASE THE DIE SET BY TWISTING THE VALVE TO THE OFF POSITION. FOR MULTI BITE PRESSING OR PRESSING IN MULTIPLE PLANES REPEAT THE PROCESS.</p>

WARRANTY

TECNI Ltd is confident of the quality of its products and therefore offers an outstanding 12 month Warranty to users on its new Tools. On the rare occasions where a product defect occurs, caused by either a) defective materials or, b) workmanship, TECNI Ltd will, without charge, repair or replace any tool or part of a tool, or new part, for **ONE YEAR** from the date of purchase.

EXCEPTIONS: Seals and diaphragms: Are warranted to be free of defects in material and/or workmanship for a period of 6 months from the date of sale.

EXCLUSIONS: THIS WARRANTY DOES NOT COVER DEFECTS, DAMAGES, PERFORMANCE DEFICIENCY OR FAILURE:

A. due to abuse, excessive wear, misuse, tampering or accidents;

B. from repairs performed by a person other than TECNI Ltd.

C. arising from failure to follow the operating instructions supplied with the tool, including but not limited to, safety instructions;

TO THE FULLEST EXTENT PERMITTED BY APPLICABLE LAW, IN NO EVENT WILL TECNI LTD BE LIABLE FOR ANY INCIDENTAL, CONSEQUENTIAL, OR SPECIAL DAMAGES OR EXPENSES. Failure to follow these instructions may void this warranty. Please contact TECNI Ltd before returning any product.